

MICROMAC CHLORINE FREE AND TOTAL ON LINE ANALYZER FOR CHLORINE FREE AND TOTAL MONITORING IN WATER



MICROMAC CHLORINE is a microprocessor controlled On Line analyzer specifically designed for automatic Total&Free Chlorine monitoring on several types of water matrix.

✓ ROBUST AND RELIABLE

Designed for industrial and Environmental On Line applications ensures the highest level of robustness in the electronics, mechanics and hydraulics components. Complete separation between electronics and hydraulics plus a simple and robust LFA* hydraulics allows easy maintenance and long terms reliable operations.

**LFA: Loop Flow Analysis patent pending*

✓ EASY TO INSTALL

The analyzer is delivered after a long and successful series of factory tests ready for installation and setup; it is provided with complete set of spares for start up. To start monitoring is enough to connect reagents, sample line, waste line and power supply.

✓ AUTOMATIC CALIBRATION

When the Calibration Time interval expires the analyzer performs a Calibration Cycle, storing and checking the new calibrant O. D. If new O.D. exceeds selected limits, an alarm contacts is closed.

✓ SAMPLE DILUTION

Sample can be analyzed as it is or after automatic dilution. Automatic dilution is factory adjusted for high range applications.

✓ MEASURING INTERVAL

User selectable; between two measurements the analyzer remains in stand by mode, without reagents consumption.

✓ FEATURES AND BENEFITS


- Fully automatic operation
- Long autonomy; low maintenance, low operating cost
- Low reagents consumption; short preparation time; low disposable costs
- Easy operation; plug in analyzer, no special training is required
- Electronics and hydraulics completely separated
- Serial interface for local o remote PC connection (option)

Chlorine measuring principle and hydraulic diagram

Micromac C Chlorine allows combined measurement of Total and Free Chlorine in water. The free chlorine ions present in the sample react with a specific color reagent, DPD, in a buffered medium, to give a pink color that is measured colorimetrically at 525 nm.

Total Chlorine is detected by adding an additional solution of KI to release the combined chlorine (e.g. monochloramine) to give a pink color, colorimetrically measured at 525 nm.

The sample concentration is calculated against the calibration factor stored in the analyzer.

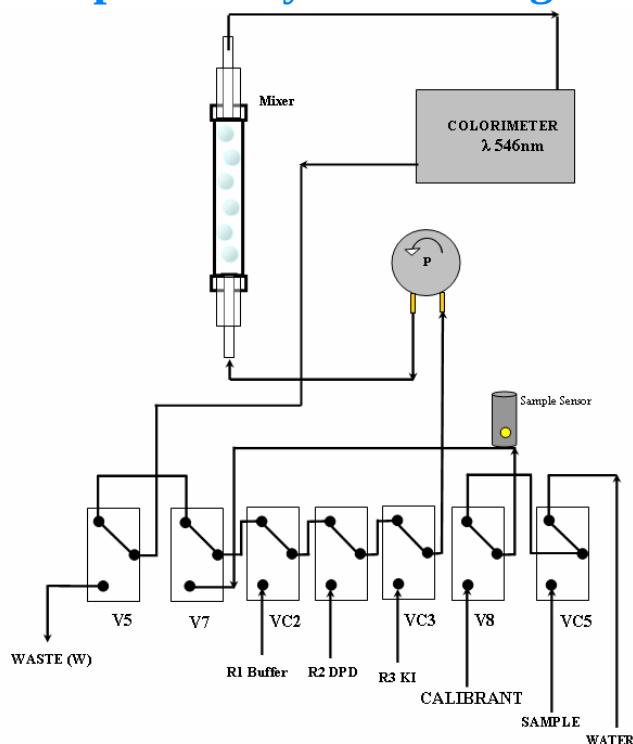

Technical Specifications

MEASURING PRINCIPLE: Colorimetric, DPD and KI (total chlorine)

COLORIMETER: dual beam, silicon detector

MEASUREMENT TYPE: cyclic

MEASURING INTERVAL: programmable

MEASURING TIME: About 22 minutes for Total&Free Chlorine

MEASURING RANGE: 0-6 ppm Cl_2 (10 ppm as full scale); other ranges available on request

DETECTION LIMIT: typically better 2% of the full scale, calculated as for EPA p. 136 appendix B

REPEATABILITY: better than 2%

OUTPUT SIGNAL: 4-20 mA

INPUT SIGNALS: n. 1 Analysis, n. 1 calibration; digital contacts

ALARMS: n. 1 High Limit, n. 1 General, n. 1 Calibration; potential free contacts

SAMPLE AND WASTE DELIVERY: pressure free;

SAMPLE TEMPERATURE: 10 °C - 30 °C

REAGENTS REPLACEMENT: 3/4 weeks depending on the operating temperature

PROTECTION: IP55

HARDWARE: PC104 industrial standard, Integrated keyboard and graphics display, RS232 option

POWER SUPPLY: 12 V DC external power supply included; 4W Standby; 10 W (mean) analysis

WEIGHT: 33 Kg without reagents;

DIMENSION: 800x450x300 mm (hwxwd)

Subject to change without notice



SYSTEA S.p.A.

HEADQUARTER AND MANUFACTURING FACILITY:

VIA PADUNI, 2A - 03012 ANAGNI (FR) ITALY

TEL: +39 0775-776058 FAX +39 0775-772204

A member of Consorzio NDI

Web Site: <http://www.systea.it> Email: info@systea.it

Document ID: MicC_ Chlorine free and Total_02-E