

MICROMAC TOTAL ALUMINIUM

ON LINE ANALYZER FOR TOTAL ALUMINIUM MONITORING IN WATER



MICROMAC TOTAL ALUMINIUM is a microprocessor controlled On Line analyzer specifically designed for automatic Total Phosphorous monitoring on several types of water matrix.

✓ ROBUST AND RELIABLE

Designed for industrial and Environmental On Line applications ensures the highest level of robustness in the electronics, mechanics and hydraulics components. Complete separation between electronics and hydraulics plus a simple and robust LFA * hydraulics allows easy maintenance and long terms reliable operations.

** LFA: Loop Flow Analysis patent pending*

✓ EASY TO INSTALL

The analyzer is delivered after a long and successful series of factory tests ready for installation and setup; it is provided with complete set of spares for start up. To start monitoring is enough to connect reagent, sample line, waste line and power supply.

✓ AUTOMATIC CALIBRATION

When the Calibration Time interval expires the analyzer performs a Calibration Cycle, storing and checking the new calibrant O. D. If new O.D. exceeds selected limits, an alarm contacts is closed.

✓ SAMPLE DILUTION

Sample can be analyzed as it is or after automatic dilution. Automatic dilution is factory adjusted for high range applications.


✓ MEASURING INTERVAL

User selectable; between two measurements the analyzer remains in stand by mode, without reagents consumption.

✓ FEATURES AND BENEFITS

- Fully automatic operation
- Long autonomy; low maintenance, low operating cost
- Low reagents consumption; short preparation time; low disposable costs
- Easy operation; plug in analyzer, no special training is required
- Electronics and hydraulics completely separated
- Serial interface for local o remote PC connection (option)

Total Aluminium measuring principle and hydraulic diagram

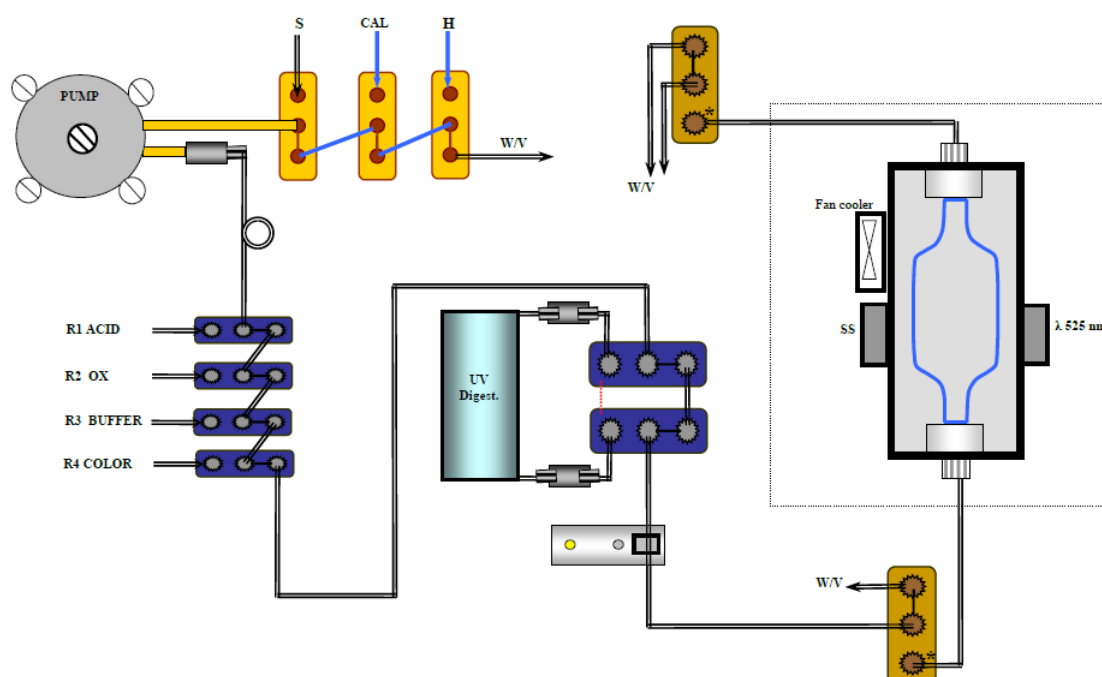

The sample is digested then with Eriochrome cyanine R dye, diluted aluminum solutions buffered to a pH of 6.0, produces a red to pink complex that exhibits maximum absorption at 525 nm. The intensity of the developed color is influenced by the aluminum concentration, reaction time, temperature, pH, alkalinity, and concentration of other ions in sample. The interference of iron and manganese, two elements often found in water, is eliminated by adding ascorbic acid.

Technical Specifications

MEASURING PRINCIPLE: Colorimetric, Acidic high T°&UV digestion, Eriochrome cyanine R

COLORIMETER: dual beam, silicon detector

MEASUREMENT TYPE: cyclic

MEASURING INTERVAL: programmable

MEASURING TIME: <30 minutes

MEASURING RANGE: 0-1/2/5/10mg/L Al²⁺, other ranges available on request

DETECTION LIMIT: better than 2% of the full scale, 7 replicates at 10% MDL x 3,14, as for EPA p. 136 appendix

REPEATABILITY: better than 5% ; SD% of 7 replicates at 50% of the full scale

ACCURACY: better than 5% , average of 7 replicates at 50% of the full scale

OUTPUT SIGNAL: 4-20 mA **INPUT SIGNALS:** n. 1 Analysis, n. 1 calibration; digital contacts

ALARMS: n. 1 High Limit, n. 1 General, n. 1 Calibration; potential free contacts

SAMPLE AND WASTE DELIVERY: pressure free; **SAMPLE TEMPERATURE:** 10 °C - 30 °C

REAGENTS CHANGE: 30 days

PROTECTION: IP55

HARDWARE: PC104 industrial standard, Integrated keyboard and graphics display, RS232 option

POWER SUPPLY: 12 V DC external power supply included; 4W Standby; 50 W (mean) analysis

WEIGHT: 33 Kg without reagents; **DIMENSION:** 800x420x280 mm(hxwx d)

Subject to change without notice



SYSTE A S.p.A.

MAIN OFFICE, PRODUCTION AND SERVICE:

VIA FRATTAROTONDA VADO LARGO , 2A

03012 ANAGNI (FR) ITALY

TEL: +39 0775-776058 FAX +39 0775-772204

Web Site: <http://www.systea.it> Email: info@systea.it

Document ID: MicC_uLFR HT DR -Al-01-E (20210827)